



CM530H SERIES

Enhanced Multifunction VFD



Safe and Durable



Outstanding Performance



Stable and Reliable

COMPANY PROFILE

Standing at the forefront of the industry
Leading the rapid development of China's inverter technology

48000²

Total area

10800²

Production lines
& workshops

500^{million yuan}

Annual output value



Founded in 2002, Changsha Sunye Electric Co., Ltd. is a national high-tech enterprise integrating the R&D, production, and sales of inverters, industrial all-in-one machines, servo drives, and new energy products. The company purchased 30 acres of land in the Changsha National High-Tech Development Zone to build its own industrial park, with a total construction area of approximately 48,000 square meters and an average annual output value of 500 million yuan. The company uses the Changsha Sunye Industrial Park as its R&D and production base, and utilizes its various offices as a hub to provide high-quality, integrated services to customers worldwide.

Honors

Sunye Electric products have passed the testing and certification of global authoritative organizations and obtained multiple software copyright and intellectual property certificates such as IOS9001, CE, and RoHS.



First recognized as a
high-tech enterprise in 2015



Provincial-level enterprise
technology center in 2022



National-level
"Little Giant" Enterprise



ISO9001
quality system certification



CE certification



Over 100 patents

► Product Overview

CM530H Series

Enhanced Multifunction VFD

The CM530H Series is a low-voltage VFD independently developed and produced by Sunye Electrical. Based on the original model, after in-depth market demand analysis and summarization of market experience, the functions and structure of the product have been upgraded and optimized. It can be used to drive asynchronous motors, synchronous motors (CM530HS), and torque motors, and is widely applied in industries such as CNC machine tools, cable, papermaking, lifting, hoisting, fans and pumps, petrochemicals, air compressors, textile machinery, plastic machinery, woodworking machinery, ceramic machinery, stone machinery, etc.

CM530H Power Range

Single Phase 220V: 0.4kW~5.5kW

Three Phase 380V: 0.75kW~800kW



CM530H Series Applications



Textile industry (needling machine)



Rubber and plastic industry
(Blown film machine)



Stone industry (Ball mill)



CNC machine tool



Synchronous machine
(industrial ceiling fan)



Synchronous machine
(high-speed permanent magnet motor)


Product Advantages

Comprehensive Features



High starting torque function

Full load motor output rated torque 102.4Nm.
SVC control speed fluctuation measured 0.2%.
SVC control speed stability precision measured 0.4%.

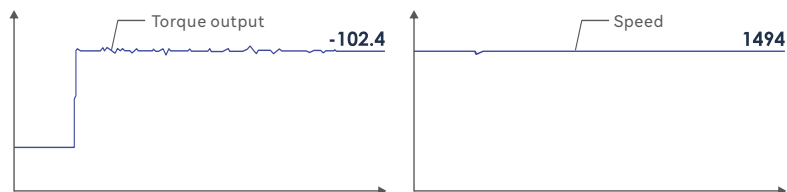


Note: Torque output, Speed graph



Instant stop function

In the event of a momentary power outage or sudden voltage drop, the inverter reduces the output speed, using the energy fed back from the load to compensate for the voltage drop, maintaining operation of the inverter for a short period of time.

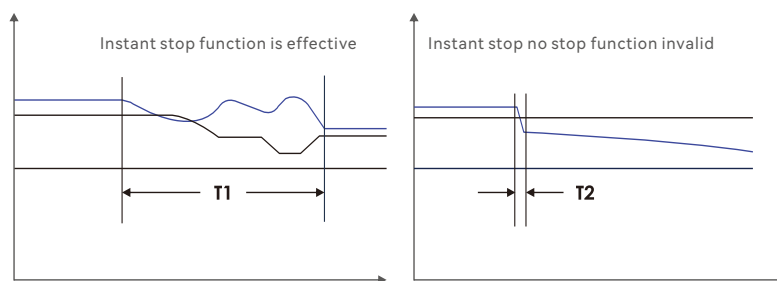


Note: Instant stop no stop function comparison graph



Speed tracking function


0.3S to achieve direction recognition speed tracking start. Applicable to fans, punch presses, and other occasions requiring speed tracking.

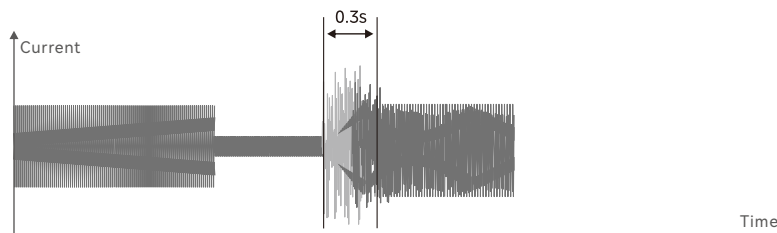

Overcurrent suppression function

Prevents motor current from exceeding the safety threshold, thus protecting the inverter and motor equipment from damage.

Applicable to machine tools, mixers, ball mills, centrifuges, conveyors, and other occasions with load variations.

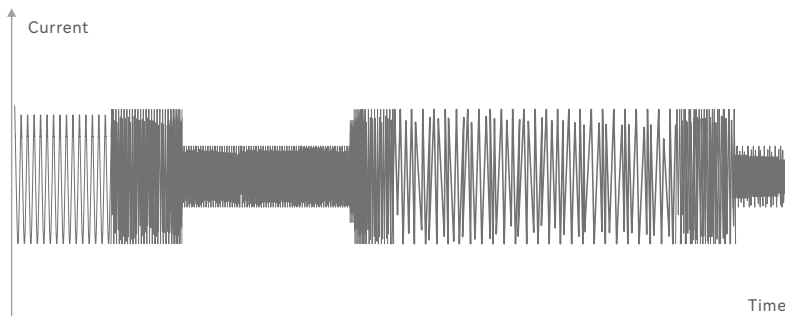

▶ Quality Assurance

Reliable Hardware and Software



Optimized low frequency overload software design

Deeply excavate and efficiently utilize the potential overload capability of IGBTs, through intelligent control strategies, significantly enhancing the overall operational stability and reliability of the product. Extending the service life of equipment, enhancing its adaptability under complex working conditions.



Long life high redundancy design

Key components and PCB board temperature rise are comprehensively monitored, optimized configuration, long design life, high redundancy thermal design.



Comprehensive protection functions

Equipped with power-on motor short-circuit protection, input and output phase loss protection, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, etc.

Test System Assurance



100% withstand voltage test

100% withstand voltage safety test upon factory release, fully ensuring product safety.



Full power aging test

Simulate high load, long-term operation, and other extreme conditions to ensure the product's long-term stability in practical applications.



Overall temperature rise test

Adopt strict cyclic overload specifications for verification to ensure reliable long-term operation under extreme load conditions.



Cyclic overload test

Cyclic Overload: At an ambient temperature of 40°C, operate at 1.5 times the rated current for 1 minute, followed by operation at 1 times the rated current for 4 minutes, then operate at 1.5 times the rated current for 1 minute again, repeating this cycle continuously, with each cycle lasting 5 minutes, until the system reaches thermal equilibrium, ensuring that the entire unit remains within the thermal design safety range. Even under overload conditions exceeding 1 times the limit, it can still operate safely and stably.



ICT and FCT dual test coverage exceeds 95%


From components to overall functionality, comprehensive verification ensures every detail is precise and error-free, creating impeccable quality to provide a solid foundation for your industrial applications.

Advanced Testing Conditions

Comprehensive safety performance testing system, Intelligent safety compliance integrated analyzer, Precision sal spray tester guaranteeing every unit undergoes comprehensive testing including dielectric strength, functionality, and Aging.



▶ Naming Rules

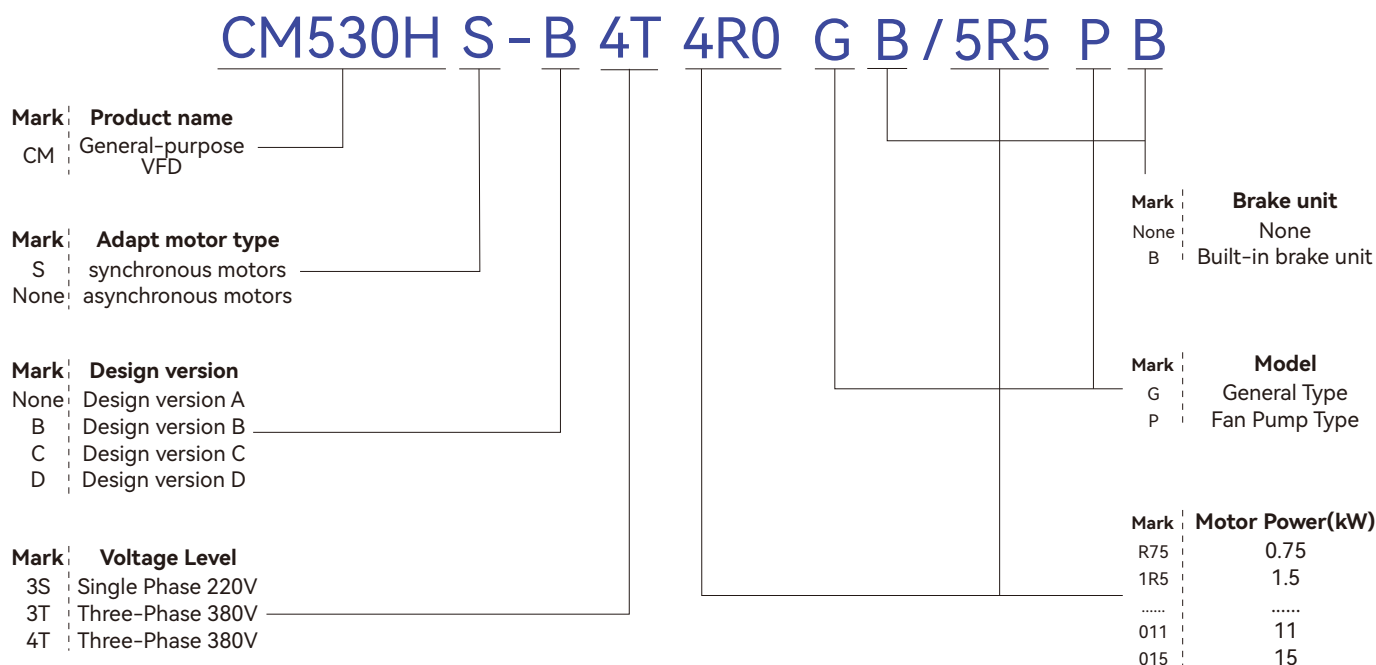


Product Selection

CM530H Inverter Model And Technical Data



Model	Input Voltage (V)	Input Current (A)	Output Current (A)	Suitable Motor (kW)
CM530H-C3SR4G	Single-phase 220V Range: -15%~+20%	5.4	2.3	0.4
CM530H-C3SR75G		8.2	4.0	0.75
CM530H-C3S1R5G		14.0	7.0	1.5
CM530H-C3S2R2GB		23.0	9.6	2.2
CM530H-3S4R0GB		32.0	17	4.0
CM530H-3S5R5GB		45.0	25	5.5
CM530H-B4TR75GB	Three-phase 380V Range: -15%~+20%	3.4	2.1	0.75
CM530H-B4T1R5GB/2R2PB		5.0/5.8	3.8/5.1	1.5/2.2
CM530H-C4T2R2GB/4R0PB		5.8/10.5	5.1/9.0	2.2/4.0
CM530H-C4T4R0GB/5R5PB		10.5/14.6	9.0/13.0	4.0/5.5
CM530H-C4T5R5GB/7R5PB		14.6/20.5	13.0/17.0	5.5/7.5
CM530H-C4T7R5GB/9R0PB		20.5/22.0	17.0/20.0	7.5/9.0
CM530H-D4T9R0GB/011PB		22.0/26.0	20.0/25.0	9.0/11.0
CM530H-D4T011GB/015PB		26.0/35.0	25.0/32.0	11.0/15.0
CM530H-D4T015GB/018PB		35.0/38.5	32.0/37.0	15.0/18.5
CM530H-4T018GB/022PB		38.5/46.5	37.0/45.0	18.5/22.0
CM530H-4T022GB/030PB		46.5/62.0	45.0/60.0	22.0/30.0

Model	Input Voltage (V)	Input Current (A)	Output Current (A)	Suitable Motor (kW)
CM530H-4T030G/037P CM530H-4T030GB/037PB	Three-phase 380V Range: -15%~+20%	62.0/76.0	60.0/75.0	30.0/37.0
CM530H-4T037G/045P CM530H-4T037GB/045PB		6.0/92.0	75.0/90.0	37.0/45.0
CM530H-4T045GB/055PB CM530H-4T045G/055P		92.0/113.0	90.0/110.0	45.0/55.0
CM530H-4T055GB/075PB CM530H-4T055G/075P		113.0/157.0	110.0/152.0	55.0/75.0
CM530H-4T075GB/093PB CM530H-4T075G/093P		157.0/180.0	152.0/176.0	75.0/93.0
CM530H-4T093GB/110PB CM530H-4T093G/110P		180.0/214.0	176.0/210.0	93.0/110.0
CM530H-4T110G/132P		214.0/256.0	210.0/253.0	110.0/132.0
CM530H-4T132G/160P		256.0/307.0	253.0/304.0	132.0/160.0
CM530H-4T160G/185P		307.0/345.0	304.0/340.0	160.0/185.0
CM530H-4T185G/200P		345.0/385.0	340.0/380.0	185.0/200.0
CM530H-4T200G/220P		385.0/430.0	380.0/426.0	200.0/220.0
CM530H-4T220G/250P		430.0/468.0	426.0/465.0	220.0/250.0
CM530H-4T250G/280P		468.0/525.0	465.0/520.0	250.0/280.0
CM530H-4T280G/315P		525.0/590.0	520.0/585.0	280.0/315.0
CM530H-4T315G/355P		590.0/665.0	585.0/650.0	315.0/355.0
CM530H-4T355G/400P		665.0/785.0	650.0/725.0	355.0/400.0
CM530H-4T400G/450P		785.0/883.0	725.0/820.0	400.0/450.0
CM530H-4T450G/500P		883.0/920.0	820.0/900.0	450.0/500.0
CM530H-4T450G/500P		920.0/1020.0	900.0/1000.0	450.0/500.0
CM530H-4T500G/550P		1020.0/1120.0	1000.0/1100.0	500.0/550.0
CM530H-4T630G		1120.0	1100.0	630.0
CM530H-4T710G		1315.0	1250.0	710.0
CM530H-4T800G		1525.0	1450.0	800.0

External Keyboard Installation Dimensions With Tray And Without Tray (mm)

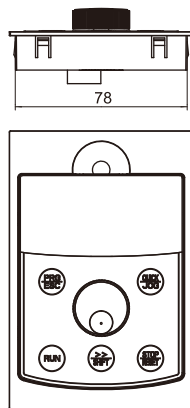

External keyboard with tray installation dimensions

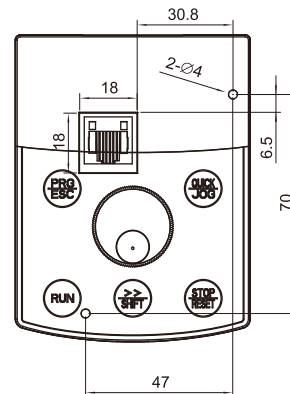


External keyboard without tray installation dimensions

CM530H Inverter Optional Accessories


For detailed functions and usage of optional accessories, refer to the relevant accessory manual. If you require any of the following optional accessories, please specify when placing your order.

Name	Model	Function	Remarks
External LED operation panel	CM530H-LED	External LED Display and Operation Keyboard	RJ45 Interface
External LCD Operation Panel	CM530-LCD	External LCD Display and Operation Keyboard	RJ45 Interface
External LED2 Operation Panel	CM530H-LED2	External LED Dual Display Operation Keyboard	RJ45 Interface
Keyboard Bracket	CM530-1105-0(Black)	For Use with Operation Keyboard	Optional


Wiring Diagram

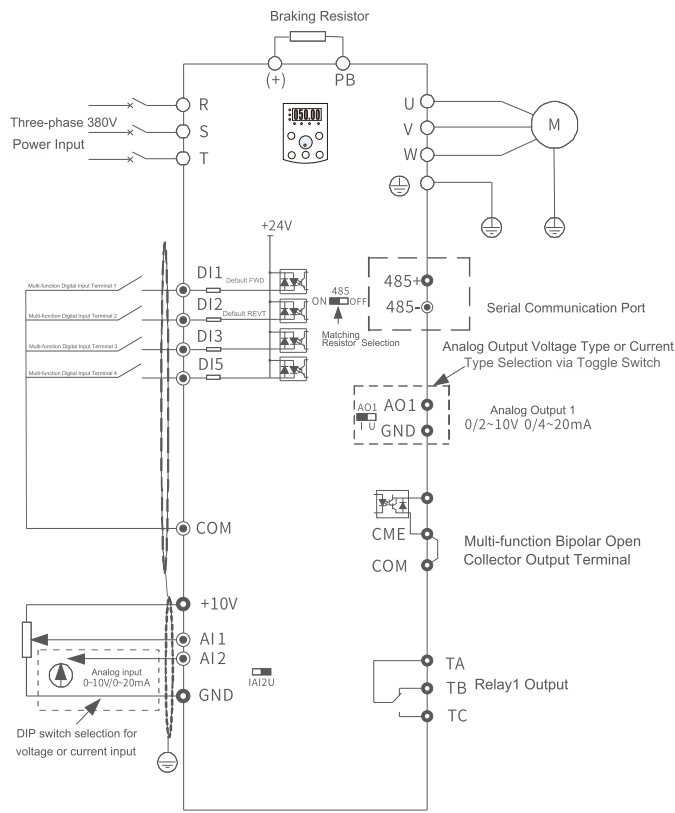


Note: This diagram applies to CM530H-0.75~2.2kW(380V) product wiring

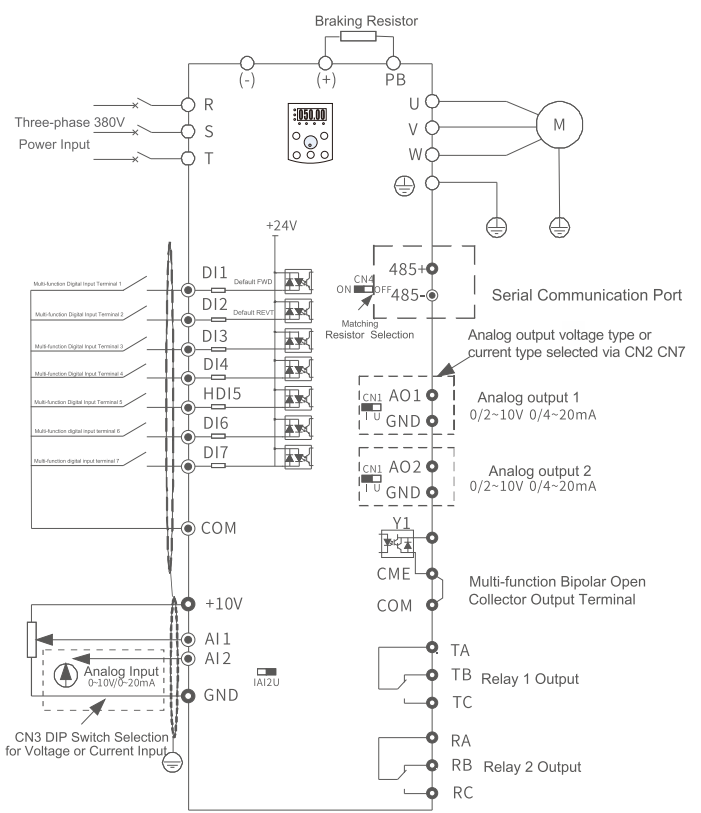

Note: The braking unit for the CM530H-4T series 30~93kW is an optional feature

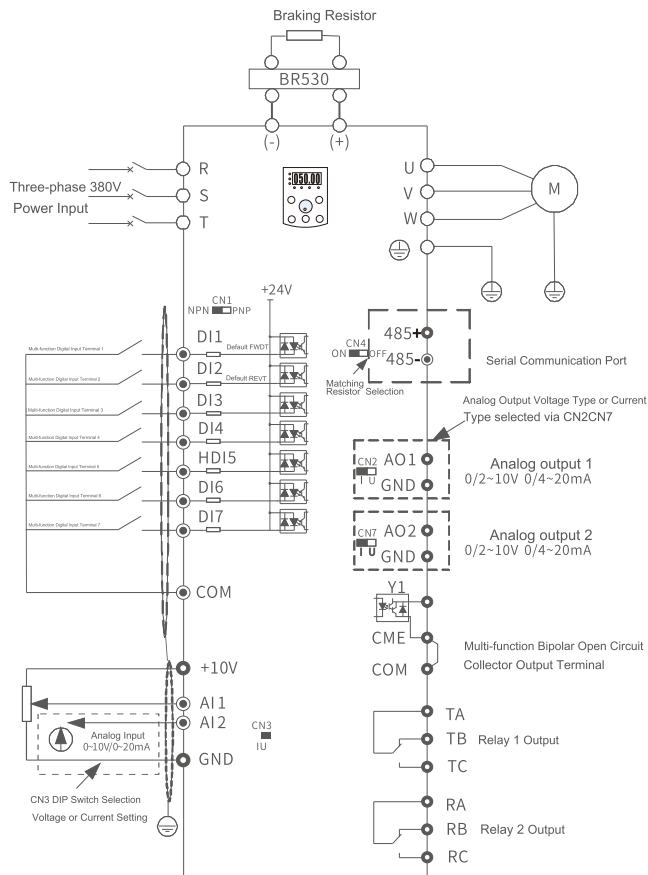

Note: CM530H-4T series 30~93kW braking unit is an optional feature

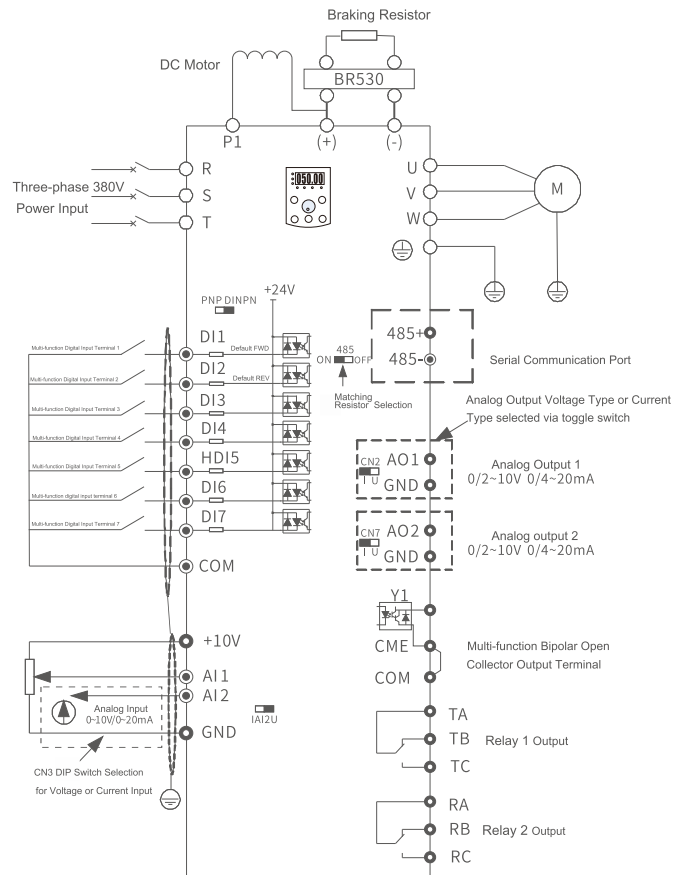

Note: CM530H-4T series 30kW~93kW braking unit is an optional feature, if required, please specify when ordering 75kW~132kW DC reactor is an optional component, 160kW and above DC reactor is a standard configuration


Technical Specifications

Project		Specifications
Main Control Performance	Maximum Frequency	Vector control: 0 ~ 599Hz
	Carrier Frequency	1k ~ 11kHz; Automatically adjusts carrier frequency based on load characteristics.
	Input Frequency Resolution	Digital setting: 0.01Hz Analog setting: maximum frequency × 0.1 %
	Control Method	Open-loop vector control (SVC), V / F control
	Starting Torque	G Series: 0.5Hz / 180% (SVC) P Series: 0.5Hz / 120% (SVC)
	Speed Range	1 : 200 (SVC)
	Speed Stability (Speed Control Accuracy)	Open-loop vector control: ± 0.5% (rated synchronous speed)
	Speed Control Stability	Open-loop vector control: ± 0.3% (rated synchronous speed)
	Torque Response	≤ 40ms (SVC)
	Overload Capacity	G-type machine: 150% rated current for 60 seconds, 180% rated current for 5 seconds P-type machine: 120% rated current for 60 seconds, 150% rated current for 5 seconds
	Torque Boost	Automatic torque boost, manual torque boost 0.1% ~ 30.0%
	V/F Curve	Three methods: linear, multi-point, square V/F curve
	Acceleration/Deceleration Curve	Linear or S-curve acceleration/deceleration method; four acceleration/deceleration times; acceleration/deceleration time range 0.0 ~ 3000.0s
	DC Braking	DC braking frequency: 0.0Hz ~ maximum frequency, Braking time: 0.0 ~ 36.0 seconds, braking action current value: 0.0% ~ 100.0%
	Jog Control	Jog frequency range: 0.00Hz ~ 50.00Hz; Jog acceleration/deceleration time: 0.0 ~ 3000.00
	Simple PLC, Multi-Speed Operation	Achieve up to 16-segment speed operation via built-in PLC or control terminals
	Built-in PID	Can conveniently achieve process control and closed-loop control systems
	Automatic Voltage Adjustment (AVR)	When the grid voltage changes, it can automatically maintain a constant output voltage
	Torque Limiting and Control	"Excavator" characteristics, automatically limits torque during operation to prevent frequent overcurrent tripping, closed-loop vector mode can achieve torque control.
Customized Functions	Power-On Peripheral Safety Self-Check	Can achieve power-on safety testing of peripheral equipment such as grounding and short circuit
	DC Bus Function	Can achieve the function of multiple inverters sharing the DC bus
	JOG Key	Programmable key: run / jog function selection
	Textile Swing Frequency Control	Multiple triangle wave frequency control functions
	Rapid Current Limiting Function	Built-in rapid current limiting algorithm, reduces the probability of overcurrent alarm in the inverter, enhances the overall anti-interference capability
	Timed Control	Timed control function: settable time range 0h ~ 65535h
	Standardized Keyboard Extension Cable	The customer can extend the keyboard using a standard network cable.
Operation	Operation Command Channel	Three channels: set by the operation panel, set by control terminals, set by serial communication port. Can be switched through various methods.
	Frequency Source	There are 10 frequency sources: digital set, analog voltage set, analog current set, pulse set, serial port set. Can be switched through various methods.
	Auxiliary Frequency Source	10 types of auxiliary frequency sources. Can flexibly achieve auxiliary frequency fine-tuning, frequency synthesis
	Input Terminals	Equipped with 7 digital input terminals, up to 9 digital input terminals (AI1, AI2 can be used as DI terminals), compatible with active PNP or NPN input methods in two modes. Analog input terminals, where AI1 can only be used for voltage input, AI2 can be used for voltage or current input. (For extended input, output terminal functions, please select the CM580 series)
	Output Terminals	1 digital output terminal (bipolar output), 2 relay output terminals, 2 analog output terminals, respectively optional 0 / 4mA ~ 20mA or 0 / 2V ~ 10V, can achieve output of physical quantities such as set frequency, output frequency, speed, etc.
Display and Keys Panel Operation	LED Display	Display parameters
	LCD Display	Optional, Chinese / English prompt operation content
	LCD Parameter Copy	Using LCD can achieve quick parameter replication
	Key Locking and Function Selection	Implement partial or full key locking, define the scope of action for some keys to prevent accidental operation
Protection and Optional Accessories	Protection Functions	Power-on motor short-circuit detection, input and output phase loss protection, overcurrent protection, overvoltage protection, undervoltage protection, overheat protection, overload protection, etc.
	Optional Accessories	LCD operation panel, braking components, etc.
Environment	Usage Environment	Indoor, not exposed to direct sunlight, free from dust, corrosive gases, flammable gases, oil mist, water vapor, dripping water, or salt, etc.
	Altitude	Below 1000 meters
	Ambient Temperature	-10 °C ~ + 50 °C (Ambient temperature between 40 °C ~ 50 °C, please use at a reduced rating)
	Humidity	Less than 95% RH, no condensation
	Vibration	Less than 5.9 m/s ² (0.6g)
	Storage Temperature	- 20°C ~ + 60°C
	Pollution Degree	2
Product Standards	Product Compliance with Safety Standards	IEC61800-5-1:2007
	Product Compliance with EMC Standards	IEC61800-3:2005

Note: Some power segments do not have hardware input phase loss detection function, please consult the manufacturer for specific models.


▶ Installation Dimensions

CM530H Inverter Appearance and Mounting Hole Dimensions (mm)

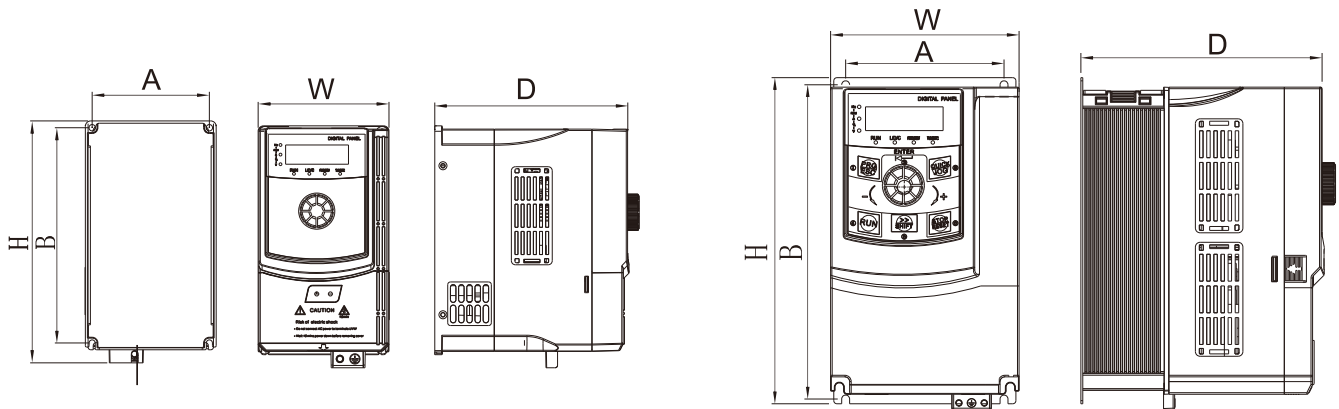


220V (3S) 2.2kW and Below Plastic Enclosure Dimensions and Installation Dimensions Schematic
380V (4T) 15kW and Below Plastic Enclosure Dimensions and Installation Dimensions Schematic

220V (3S) 4.0~5.5kW Plastic Enclosure Dimensions and Installation Dimensions Schematic

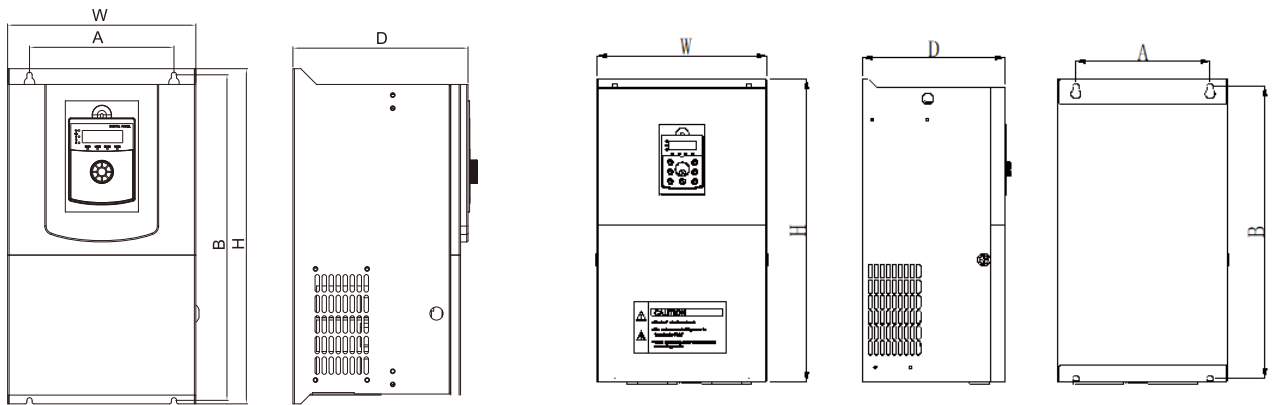

380V(4T) 18~37kW Inverter Dimensions and Installation Dimensions Schematic

380V(4T) 45~132kW Inverter Dimensions and Installation Dimensions Schematic

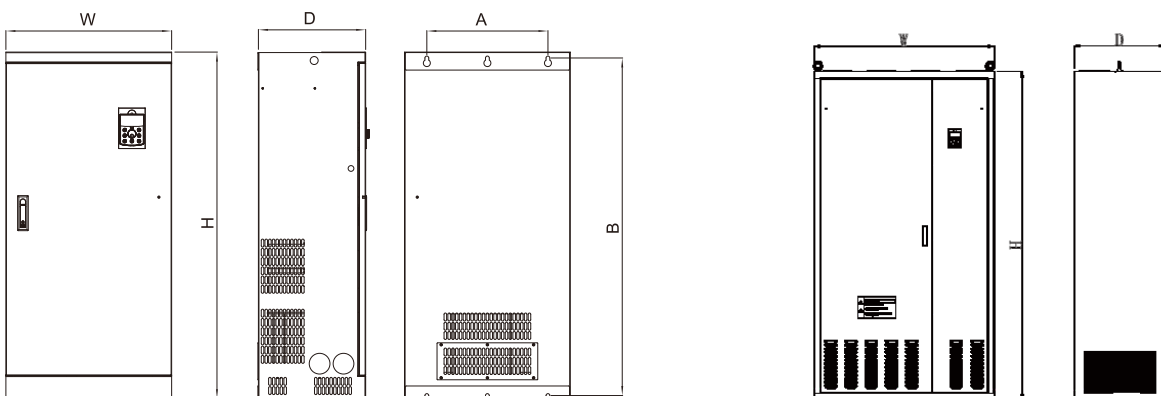

380V(4T) 160~400kW Inverter Dimensions and Installation Dimensions Schematic

380V(4T) 450~800kW Inverter Dimensions and Installation Dimensions Schematic

Model Description: If the product model ends with "B", it indicates that the braking unit is standard equipment. Please specify this when placing an order if required.

CM530H External Dimensions And installation Hole Dimensions

Model	Mounting holes		Wall Penetration Opening Dimensions			Installation Hole Diameter (mm)
	A(mm)	B(mm)	H(mm)	W(mm)	D(mm)	
CM530H-C3SR4G	78	162	172.5	96	141	φ4.5
CM530H-C3SR75G						
CM530H-C3S1R5G						
CM530H-C3S2R2GB	100	199	206	119	154	φ5
CM530H-3S4R0GB	100	199	206	119	154	φ5
CM530H-3S5R5GB						
CM530H-B4TR75GB	86	158	172.5	96	141	φ4.5
CM530H-B4T1R5GB/2R2PB						
CM530H-C4T2R2GB/4R0PB						
CM530H-C4T4R0GB/5R5PB	100	199	206	119	154	φ5
CM530H-C4T5R5GB/7R5PB	120	260	268	139	155.5	φ5
CM530H-C4T7R5GB/9R0PB						
CM530H-D4T9R0GB/011PB	150	314	324	188	188	φ6
CM530H-D4T011GB/015PB						
CM530H-D4T015GB/018PB						
CM530H-4T018GB/022PB	165	372	383	215	200	φ6
CM530H-4T022GB/030PB						
CM530H-4T030GB/037PB/030G/037P	200	436	449	260	209	φ7
CM530H-4T037GB/045PB/037G/045P						
CM530H-4T045GB/055PB/045G/055	245	531	550	310	260	φ10
CM530H-4T055GB/075PB/055G/075						
CM530H-4T075GB/093PB/075G/09	280	561	580	350	267	φ10
CM530H-4T093GB/110PB/093G/110P						
CM530H-4T110G/132P	320	695	715	430	295	φ10
CM530H-4T132G/160P						
CM530H-4T160G/185P	360	972	1000	470	318	φ12
CM530H-4T185G/200P						
CM530H-4T200G/220P	380	1060	1088	520	338	φ12
CM530H-4T220G/250P						
CM530H-4T250G/280P	440	1190	1220	650	330	φ12
CM530H-4T280G/315P						
CM530H-4T315G/355P	500	1255	1290	740	420	φ14
CM530H-4T355G/400P						
CM530H-4T400G/450P						
CM530H-4T450G/500P	-	-	1800	1060	500	-
CM530H-4T500G/550P						
CM530H-4T550G/630P						
CM530H-4T630G						
CM530H-4T710G	-	-	2200	1200	600	-
CM530H-4T800G						

Your Trusted Partner In Intelligent Automation Solutions



CHANGSHA SUNYE ELECTRIC CO.,LTD.

HotLine: 0731-89932666

400-0755-731

E-mail: sales@cssunye.com

info@cssunye.com

WhatsApp: +86152 7327 6875 / +86138 6879 5229

Address: No.669, Xincheng Road, Yuelu District, Changsha City, China.

Website: www.cssunye.com

